

## DETAILED WRITTEN INSTALLATION INSTRUCTIONS

In surface requirements – Qty 1 of 25.4mm hole.

1. Insert transparent washer through tail.
2. Assemble drinking water pillar tap set onto surface through hole; ensuring washer is sandwiched between set and the surface.
3. Insert the fibre washer and the nut onto tail, ensuring washer is sandwiched between the nut and the surface underneath. The grub screw for the spout should preferably be installed at the back.
4. Tighten nut.
5. Screw in grub screw using provided 2mm Allen Key. The nylon on the swivel has a gap. This gap must be aligned with the grub screw when outlet is inserted. Do up grub screw all the way until it stops, then relieve back slightly to allow spout to swivel. Still check this if spout is already installed to the tap body.

**IMPORTANT** Maximum hot water temperature 65°C and 500 kPa Maximum operating pressure at any outlet within a building (Ref AS/NZS 3500)

**WARRANTY** The Company accepts responsibility for any fault due to the Company's own workmanship or materials except for subjective variations or random unavoidable blemishes of a minor non-functional nature. This acceptance of responsibility is for 5 years from the date of installation, proof of which may be required.

Last Review Date: 18/01/2022



CB IDEAL TAPWARE PTY LTD

1A DELORAINIE ROAD, EDWARDSTOWN S.A. 5039

PH: (08) 8276 6766 | sales@cbideal.com.au

ABN: 98 156 625035 | ACN: 156 625 035


# DRINKING WATER PILLAR TAP WITH SWIVEL OUTLET

## INSTALLATION INSTRUCTIONS



[www.cbideal.com.au](http://www.cbideal.com.au) | [sales@cbideal.com.au](mailto:sales@cbideal.com.au)

1

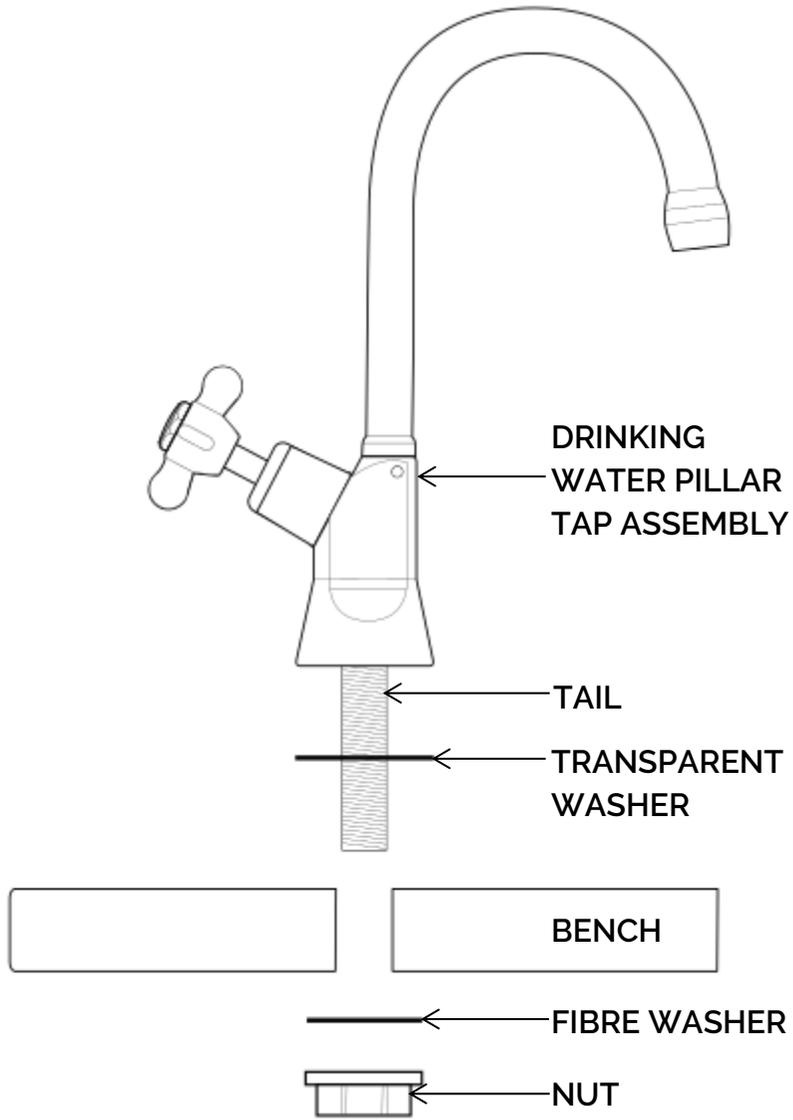

2

