

## DETAILED WRITTEN INSTALLATION INSTRUCTIONS

In wall requirements –2 x ½” BSP male threads at 150mm centres

1. Take angle taps from set as supplied, install pressed flanges and taps on to in-wall threads (use thread tape) with outlets of taps pointing upwards.
2. Fit nuts and olives on to breaching piece.
3. Tighten nuts down on to outlets of taps in above with a spanner.
4. Align spout inlet with breech outlet.
5. Attach spout to breech
6. Screw in grub screw using provided 2mm Allen Key. The nylon on the swivel has a gap. This gap must be aligned with the grub screw when inserted.
7. Do up grub screw all the way until it stops, then relieve back slightly to allow spout to swivel. Still check if spout is already installed to the breech.

**IMPORTANT** Maximum hot water temperature 65°C and 500 kPa Maximum operating pressure at any outlet within a building (Ref AS/NZS 3500)

**WARRANTY** The Company accepts responsibility for any fault due to the Company's own workmanship or materials except for subjective variations or random unavoidable blemishes of a minor non-functional nature. This acceptance of responsibility is for 5 years from the date of installation, proof of which may be required.

Last Review Date: 10/03/2021



CB IDEAL TAPWARE PTY LTD

1A DELORAINIE ROAD, EDWARDSTOWN S.A. 5039

PH: (08) 8276 6766 | sales@cbideal.com.au

ABN: 98 156 625035 | ACN: 156 625 035


# EXPOSED WALL SINK SET WITH “U” BREECH

## INSTALLATION INSTRUCTIONS




[www.cbideal.com.au](http://www.cbideal.com.au) | [sales@cbideal.com.au](mailto:sales@cbideal.com.au)


1

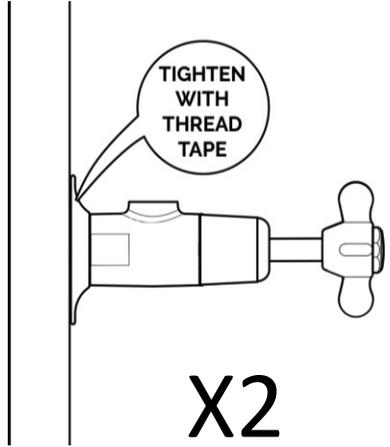


2

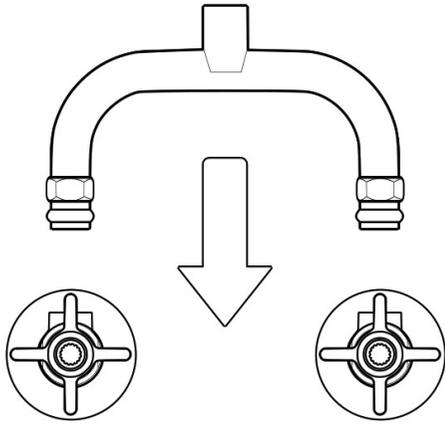


3

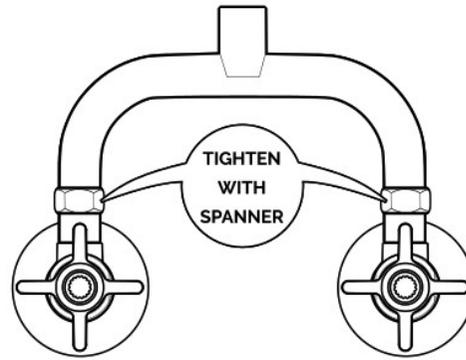

4

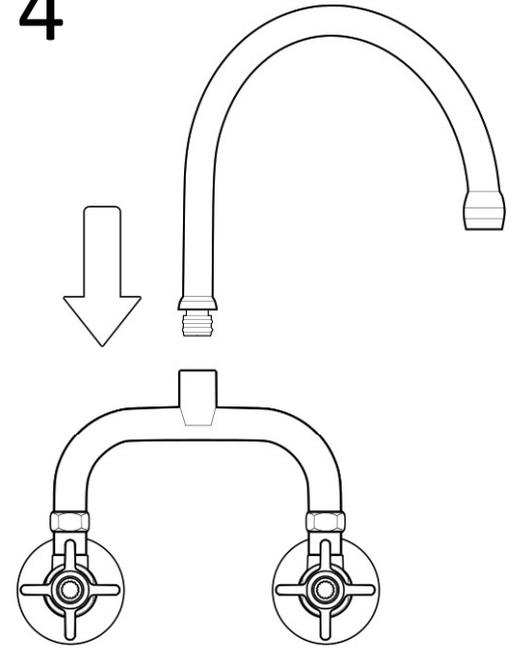

5

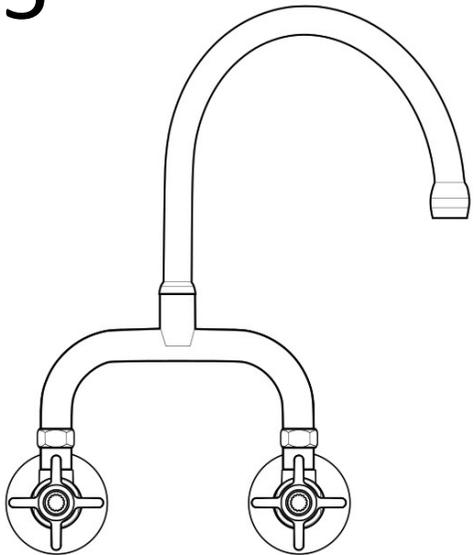

6

