




CB IDEAL TAPWARE PTY LTD

1A DELORAINE ROAD, EDWARDSTOWN S.A. 5039

PH: (08) 8276 6766 FAX: (08) 8276 6623

ABN: 98 156 625035 ACN: 156 625 035

Please leave these instructions with tapware after installation

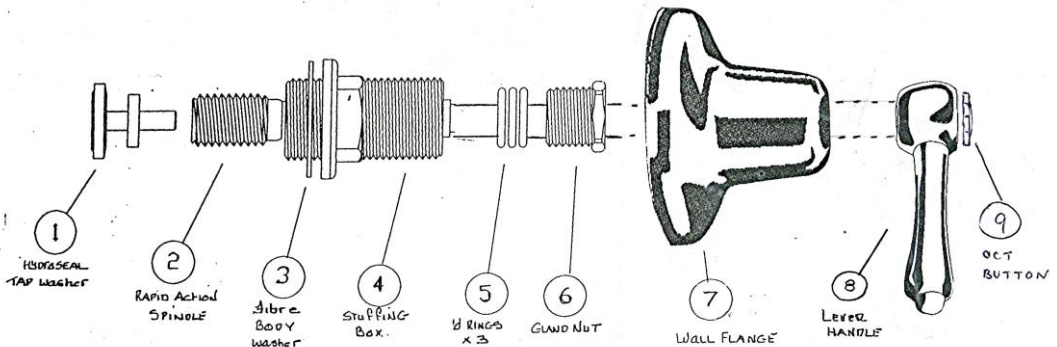

Rapid Action Lever Wall or Hob Top Assemblies

To adjust tension you don't need to turn off the water – remove the button and handle, and unscrew flange.

If the handle is dropping by itself then tighten the gland nut (6) by $\frac{1}{4}$ turn at a time. Continue to tighten and then check until there is enough tension to hold the lever.


If the action is too tight then loosen the gland nut (6) until the lever is comfortable to turn.

Maintenance and upkeep (water off).

Make sure the spindle (2) has ample grease, and re-lubricate from time to time, as this can upset the tension.

O'rings and jumper valves will wear over time and cause tension problems. Replace with Hydroseal (1) valves and "BS110" o'rings.

Please leave these instructions with tapware after installation

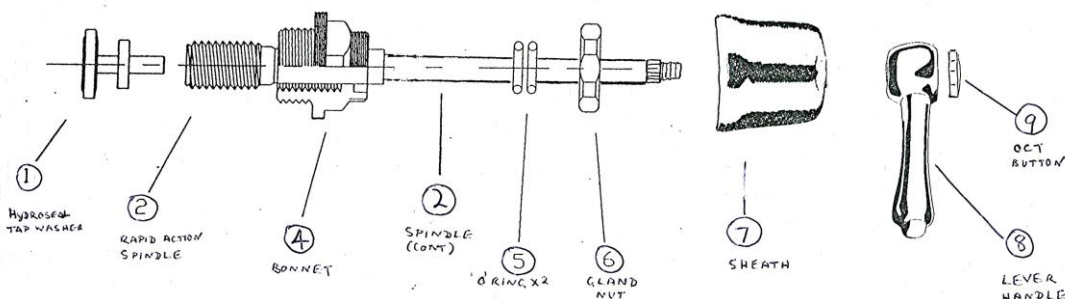

Rapid Action Lever Bib/pillar Top Assemblies

To adjust tension you don't need to turn off the water – remove the button and handle, and unscrew flange.

If the handle is dropping by itself then tighten the gland nut (6) by ¼ turn at a time. Continue to tighten and then check until there is enough tension to hold the lever.

If the action is too tight then loosen the gland nut (6) until the lever is comfortable to turn.

Maintenance and upkeep (water off).

Make sure the spindle (2) has ample grease, and re-lubricate from time to time, as this can upset the tension.

O'rings and jumper valves will wear over time and cause tension problems. Replace with Hydroseal (1) valves and "BS110" o'rings.